1 Floor Mounting Option - Freestanding

INSTALL BASE PLATE TO BODY BOTTOM PLATE
USING FOUR M6x14mm FLAT HEAD SCREWS (PROVIDED).
TIGHTEN USING T-30 TORX SCREWDRIVER

Body bottom plate

Align shapes
when installing

Base plate

Countersunk holes
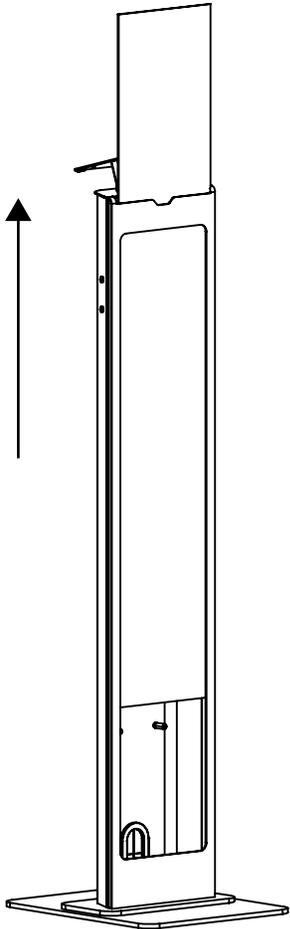for screwing base
plate to body

Straight holes
for mounting base
plate & body
to floor

1A Floor Mounting Option - Bolt To Floor

COMPLETE STEP 1
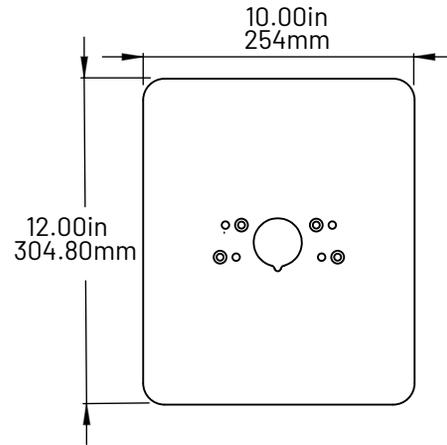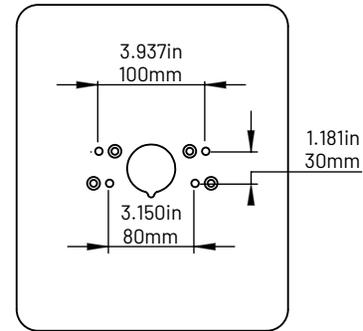
TILT

REMOVE RUBBER CAP
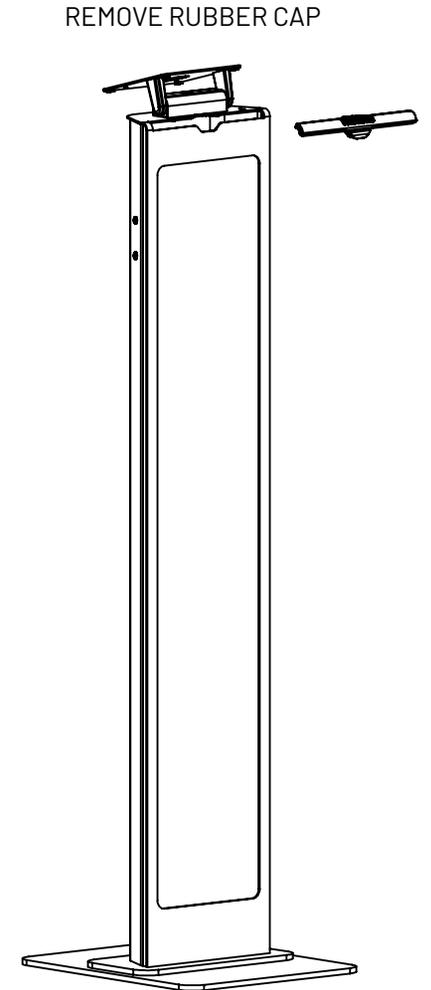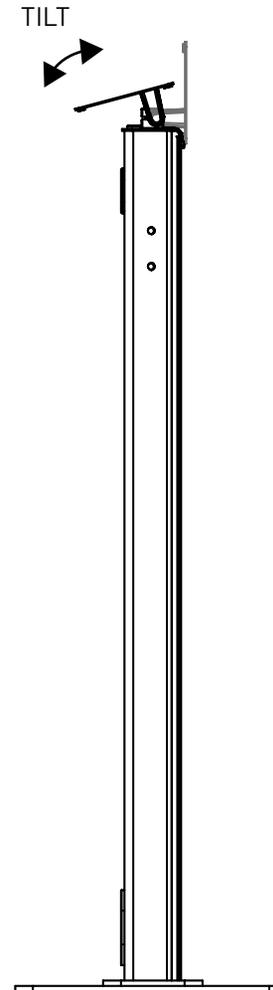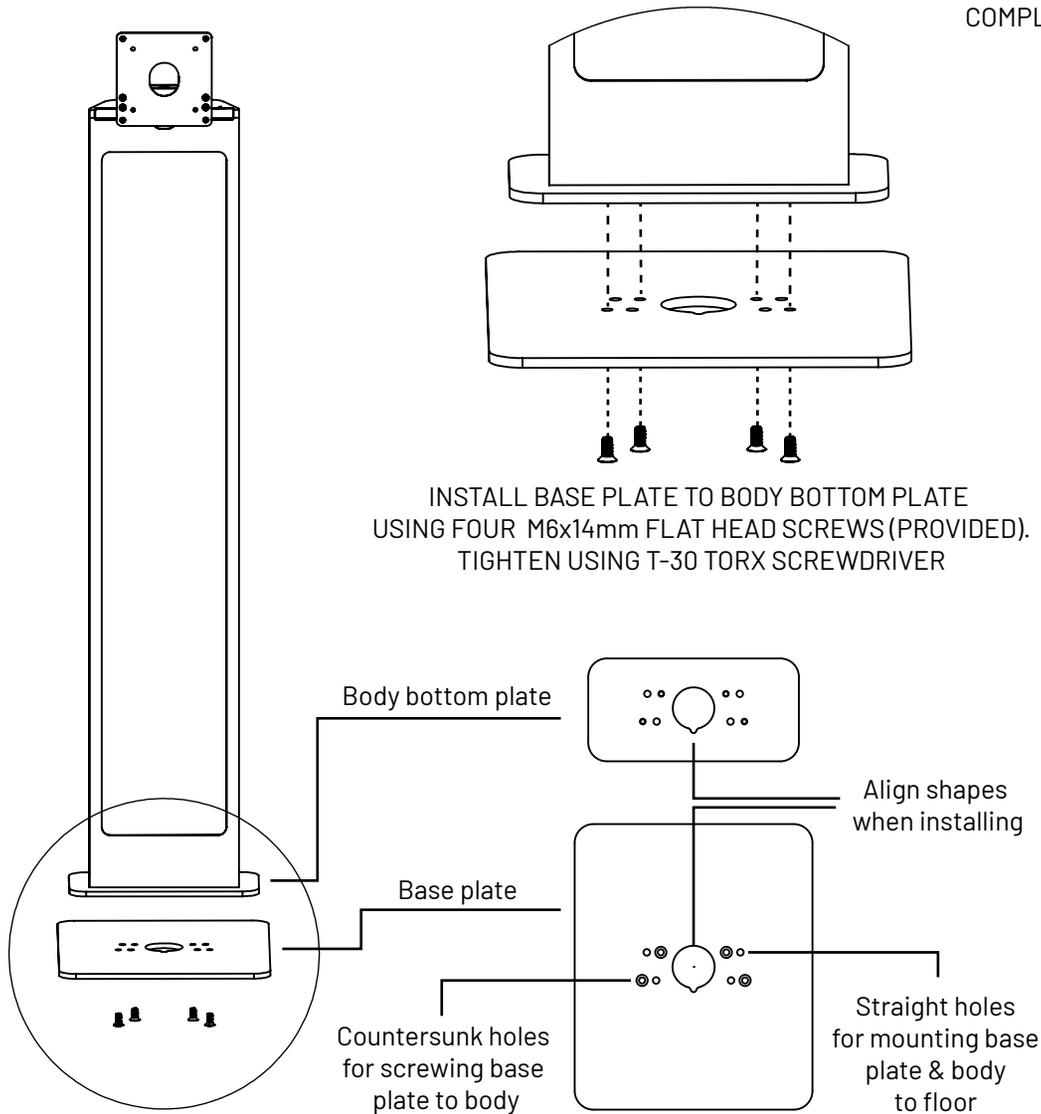
1A - Continued

TAKE OUT COVER PANEL

BOTTOM PLATE SIZE

FLOOR MOUNTING PATTERN

PUT THE COVER PANEL BACK

10.00in
254mm

12.00in
304.80mm

3.937in
100mm

1.181in
30mm

3.150in
80mm
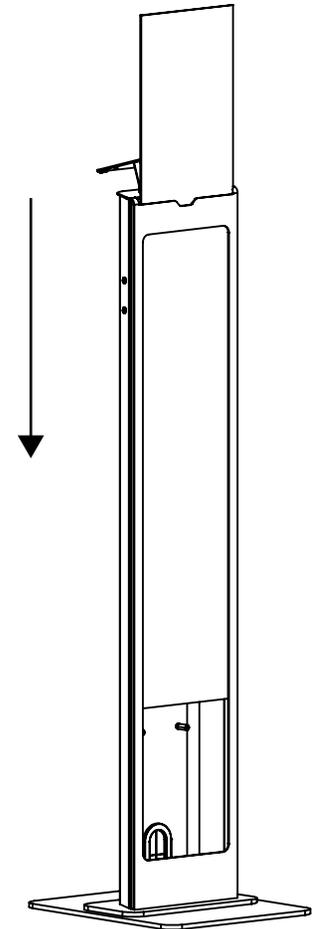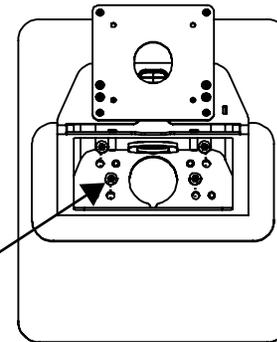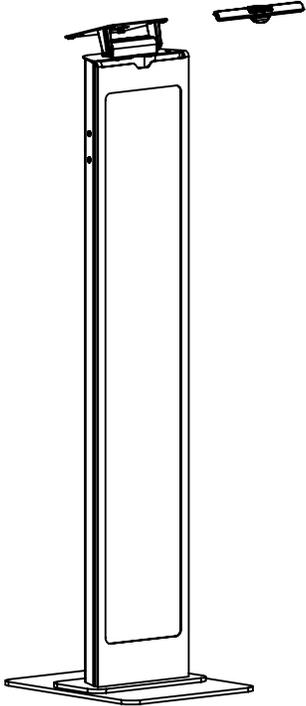
LOCATE SCREW HOLES IN BODY
BOTTOM PLATE
BOLT TO FLOOR USING
APPROPRIATE BOLTS
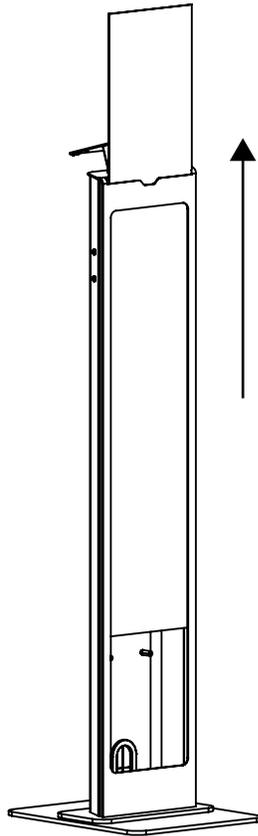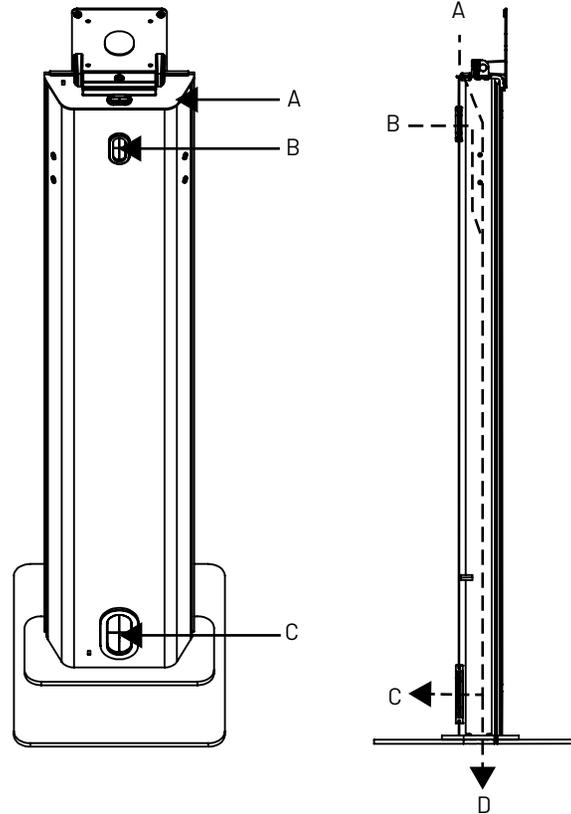FOR FLOOR TYPE (NOT PROVIDED)

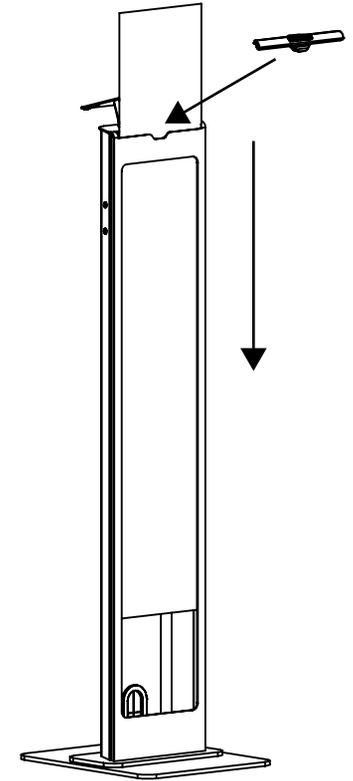## 2 Cable Management Options

REMOVE RUBBER CAP

TAKE OUT COVER PANEL

A - INLET IN TOP PLATE
B - INLET IN BACK PLATE
C - EXIT IN BACK PLATE
D - EXIT IN BASE PLATE
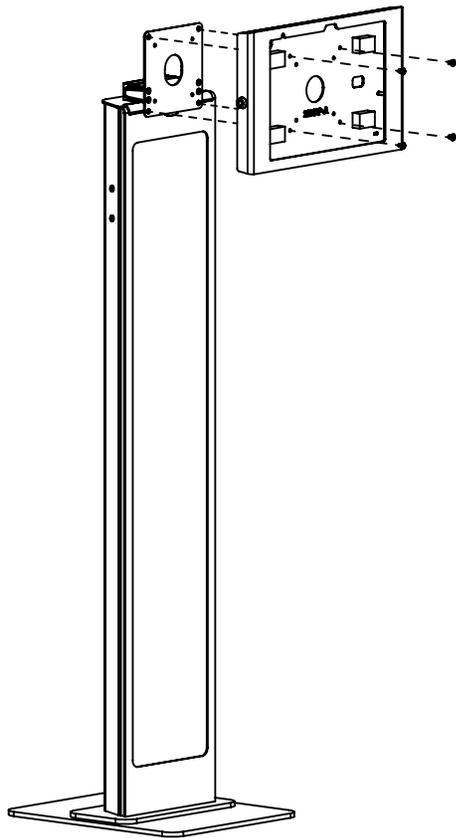
1.PUT THE COVER PANEL BACK
2.PUT BACK THE RUBBER CAP*

*for easier insertion the rubber cap,
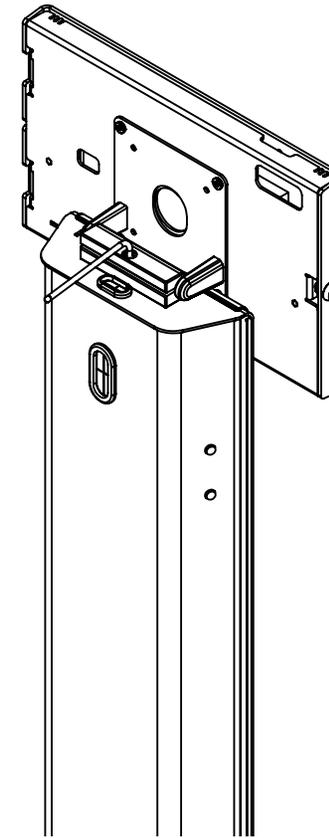use a flat head screwdriver or simlliar
object to adjust the cap.

3A Install Device

3B

INSTALL YOUR TABLET ENCLOSURE
(OR VESA COMPATIBLE MOUNTING SOLUTION)
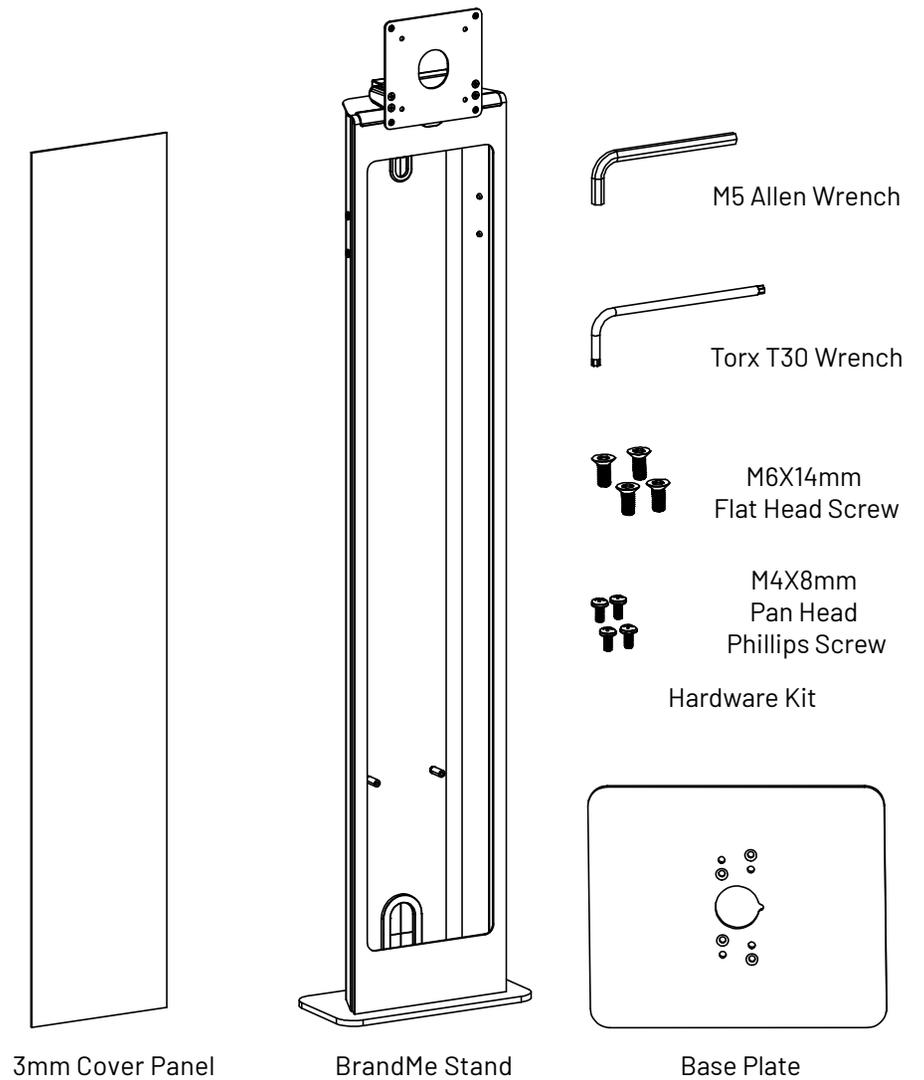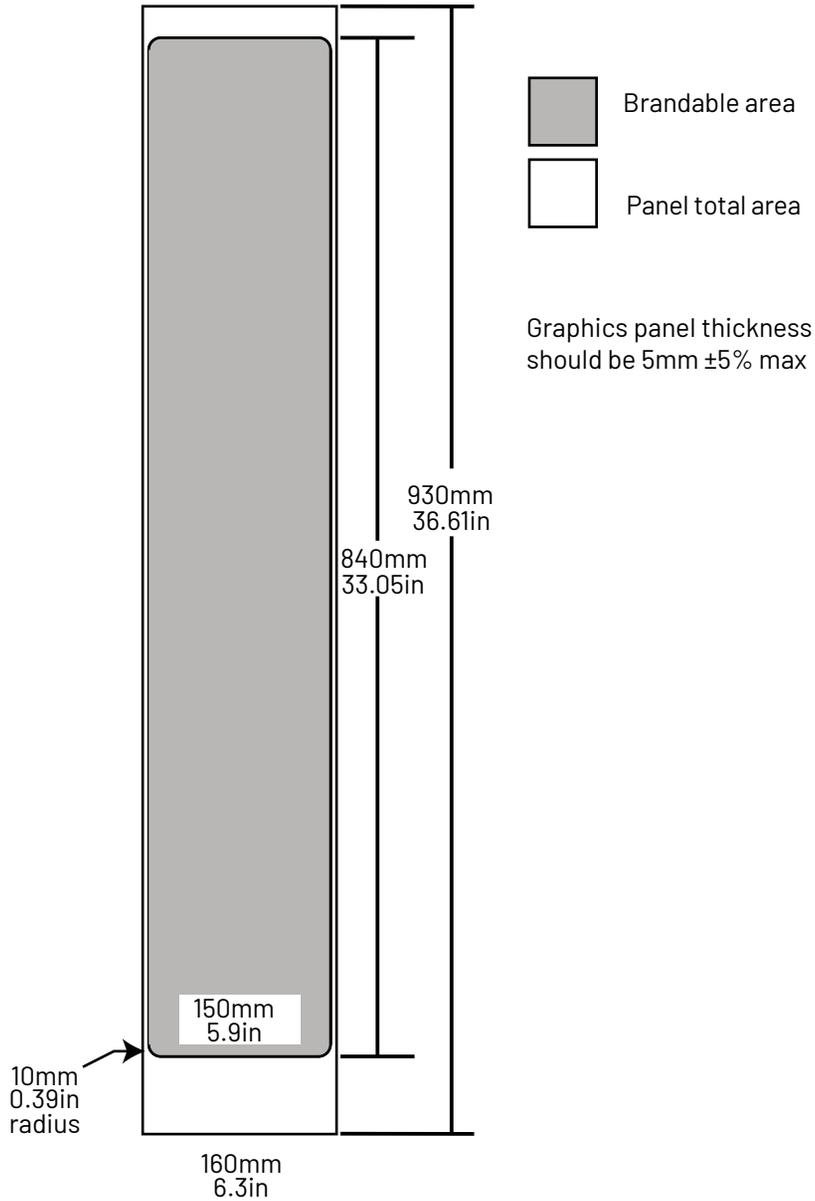USING FOUR M4x8mm PHILLIPS PAN HEAD SCREWS (PROVIDED)

ADJUST TILT RESISTANCE BY
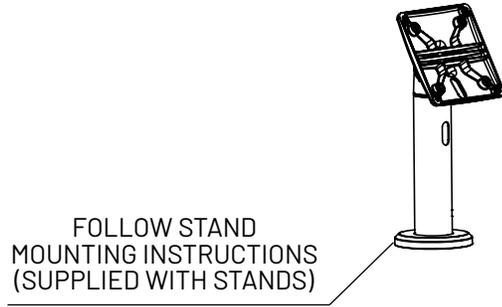TIGHTENING THE SCREW LOCATED
ON THE HINGE ASSEMBLY

Graphic Panel Specifications

Brandable area

Panel total area
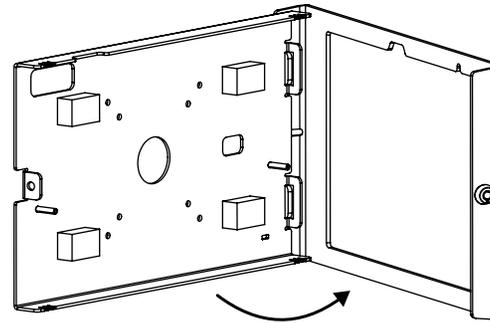
Graphics panel thickness
should be 5mm ±5% max

930mm
36.61in

840mm
33.05in

150mm
5.9in

10mm
0.39in
radius

160mm
6.3in

In The Box

M5 Allen Wrench

Torx T30 Wrench

M6X14mm
Flat Head Screw

M4X8mm
Pan Head
Phillips Screw

Hardware Kit

3mm Cover Panel

BrandMe Stand

Base Plate

Apex Enclosure
Assembly Instructions

COMPULOCKS

1

FOLLOW STAND
MOUNTING INSTRUCTIONS
(SUPPLIED WITH STANDS)

Or

WALL

WALL MOUNTING
(SCREWS NOT PROVIDED)
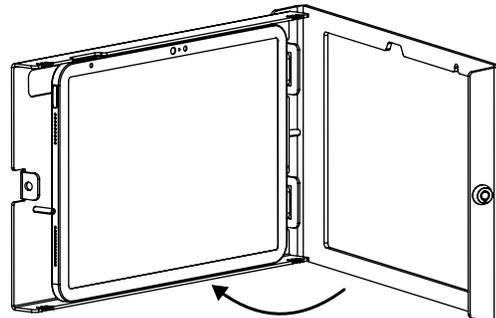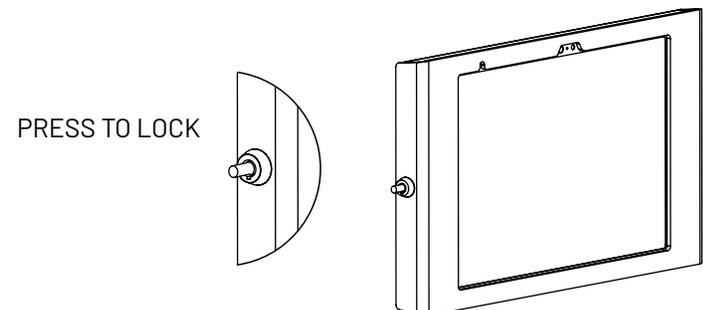

2

ROTATE 90°

3

4

5

6

PRESS TO LOCK

IN THE BOX

Apex Enclosure

Keys